

UNCLASSIFIED

AD NUMBER
ADB073633
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Specific Authority; 22 APR 1985. Other requests shall be referred to David W. Taylor Naval Ship Research and Development Center, DTNSRDC, Code 2814. Annapolis, MD 21402.
AUTHORITY
DTNSRDC, per DTIC Form 55

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD NUMBER
ADB073633
NEW LIMITATION CHANGE
TO Distribution authorized to U.S. Gov't. agencies and their contractors; Specific Authority; 22 APR 1985. Other requests shall be referred to David W. Taylor Naval Ship Research and Development Center, DTNSRDC, Code 2814. Annapolis, MD 21402.
FROM Distribution authorized to U.S. Gov't. agencies only; Test and Evaluation; 04 MAY 1983. Other requests shall be referred to David W. Taylor Naval Ship Research and Development Center, DTNSRDC, Code 2814. Annapolis, MD 21402.
AUTHORITY
DTNSRDC ltr, 22 Apr 1985

THIS PAGE IS UNCLASSIFIED

AD B073633

AUTHORITY:

DTNSRDC
Notice, 26 Apr 85



THIS REPORT HAS BEEN DELIMITED
AND CLEARED FOR PUBLIC RELEASE
UNDER DOD DIRECTIVE 5200.20 AND
NO RESTRICTIONS ARE IMPOSED UPON
ITS USE AND DISCLOSURE,

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.

UNCLASSIFIED


COANDA CONTROL OF A THICK WALL-JET IN THE STATIC CASE (U)

IR Project 1660-610

G.G. Huson

(U) The thrust from a turbofan engine top-mounted on a circulation control (CC) wing was recently found to vector downward (and in some cases more than 90 degrees downward, producing thrust reversal) when the CC Coanda jet is activated. Experimental research was undertaken to provide a basis for understanding this phenomenon, for projecting its practical limits, and for exploiting its benefits. Within the range of parameters investigated, thrust-turning performance tended to improve with increases in aspect ratio of the upstream nozzle, thickness of the wing trailing edge, and nondimensional distance of the upstream nozzle ahead of the trailing edge. Maximum thrust turning was found to correspond to a relatively constant minimum ratio of trailing edge surface pressure to ambient pressure; suggesting the hypothesis that a trailing edge shape designed to produce uniform reduced static pressure over the trailing edge would be optimum.

(UNCLASSIFIED)

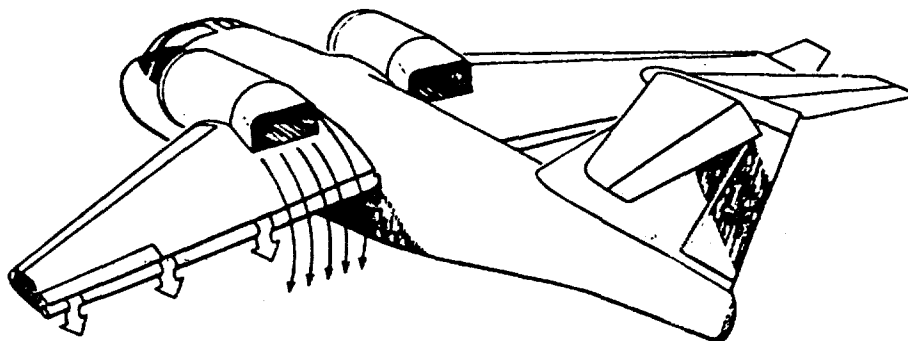

(U) Figure - Circulation Control Wing-Upper Surface Blowing
Advanced High Lift, Short Takeoff and Landing (STOL)
Aircraft Concept

(U) Circulation control (CC) has been the subject of extensive research at the Center. Most research has been directed toward using a rounded trailing edge on an airfoil with a pressurized jet of gas exhausting tangent to the trailing edge from the upper surface at the initiation of the turn. This jet flows over the trailing edge conforming to its shape (Coanda effect) and induces upstream air on the upper surface to follow the jet flow. This phenomenon effectively increases the lift an airfoil can generate, and, when installed on an aircraft, significantly reduces the take-off and landing distance required as well as the mechanical complexity of the

David W. Taylor Naval Ship R & D Center
Annapolis, MD 21402

UNCLASSIFIED

DTIC
ELECTE
MAY 24 1983
A

Distribution limited to U.S. Gov't. agencies only
Test and Evaluation: 4 May 83 Other requests
for this document must be referred to DTIC/RDC
Code 2814 unclassified, ind. 21402

AD B073633


DTIC FILE COPY

PAGES _____
ARE
MISSING
IN
ORIGINAL
DOCUMENT

UNCLASSIFIED

wing. It was recently discovered that the CC trailing edge can also produce substantial downwash turning of the net thrust from a turbofan engine top-mounted on the wing, as shown in the next figure. The combination of upper-surface blowing (USB) with a CC wing may have great practical use in many applications, depending upon the efficiency with which it can be produced and the physical limitations to which it is subject.

(UNCLASSIFIED)

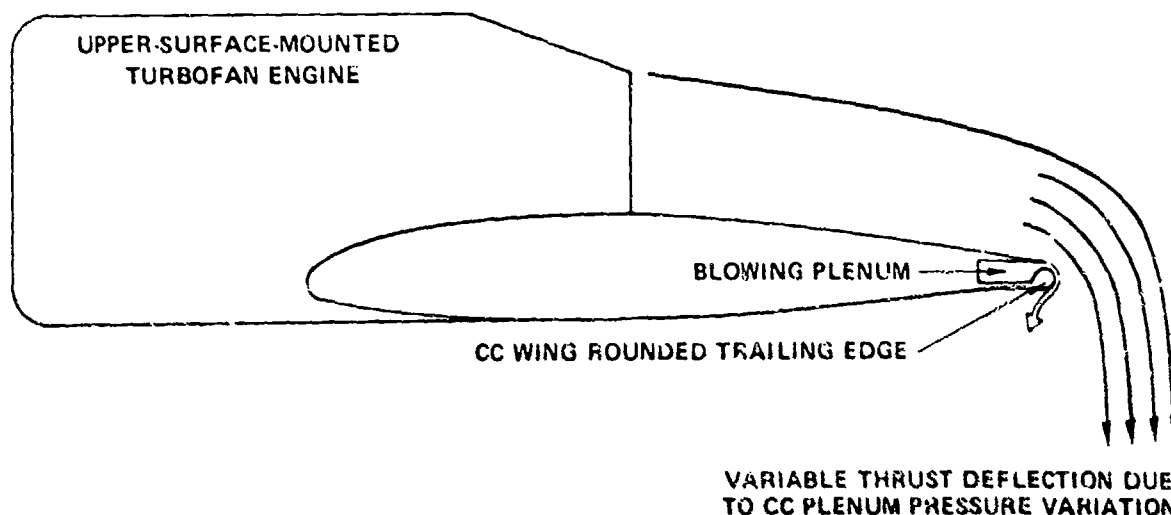

(U) Figure - Circulation Control--Upper Surface Blowing
Engine Thrust Deflector

(U) The intent of the project was to experimentally determine what parameters influence the performance of the CC jet exhaust deflector and what combinations of these parameters produce the most efficient turning, and to achieve some first-order theoretical understanding of the phenomena involved. Experimental data covering a broad parametric matrix of geometric and flow variables were generated and some basic hypotheses have been formulated.

(U) The experimental arrangement is shown in the third figure, comprised of a CC thrust deflector, a turbofan propulsion simulator (thick wall-jet generator), three interchangeable two-dimensional nozzles, two six-component balances, and the supporting structure. (For convenience, the rig is constructed "upside down" so that the wall-jet produced by the turbofan simulator is turned upward differing from other illustrations of the concept.) The varying parameters are as follows:

Radius of the rounded trailing edge, r

Thickness of the Coanda jet, h_j

Entrainment length--the distance between the exit plane of the thick wall-jet nozzle and the Coanda jet nozzle exit plane, x_j


Thick wall-jet exit momentum, or thrust, T

UNCLASSIFIED

Coanda jet momentum, $\dot{m}V_j$

Width of the Coanda control jet and surface, w

Thick wall-jet aspect ratio, w/h

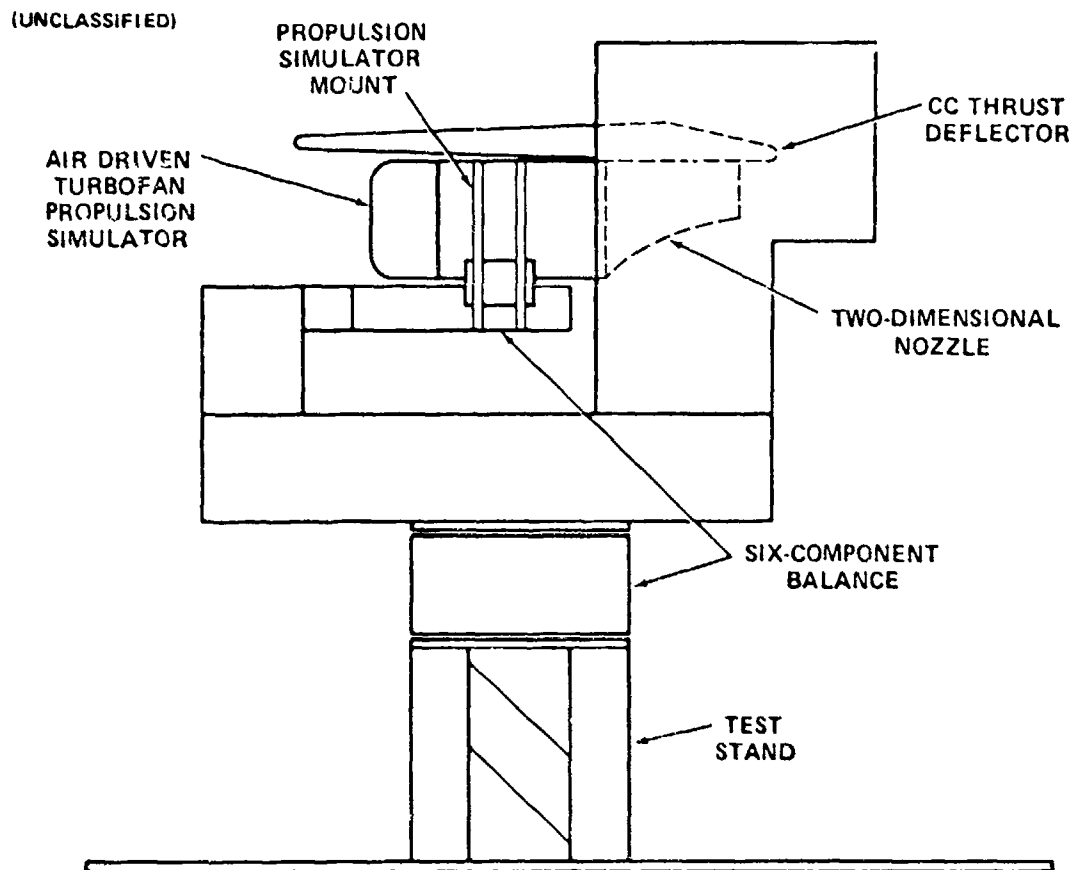

(U) Figure - Thrust Turning Research Experimental Arrangement

(U) Static pressure measurements as well as force measurements were recorded. Referring to the arrangement shown in the figure, static pressure taps were located along the center span of the CC thrust deflector in the region where the profile outline is dashed. The pressures sensed by these taps were integrated, yielding a resultant force which was resolved into its horizontal and vertical components. Two strain gage balances were used for similar purposes. The balance located directly beneath the turbofan simulator measured the force produced by the simulator alone while the second balance recorded the total system forces. The difference between the two balance measurements is a measure of the thrust turning efficiency.

UNCLASSIFIED

Accession For

Serial

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

535

536

537

538

539

540

541

542

543

544

545

546

547

548

549

550

551

552

553

554

555

556

557

558

559

560

561

562

563

564

565

566

567

568

569

570

571

572

573

574

575

576

577

578

579

580

581

582

583

584

585

586

587

588

589

590

591

592

593

594

595

596

597

598

599

600

601

602

603

604

605

606

607

608

609

610

611

612

613

614

615

616

617

618

619

620

621

622

623

624

625

626

627

628

629

630

631

632

633

634

635

636

637

638

639

640

641

642

643

644

645

646

647

648

649

650

651

652

653

654

655

656

657

658

659

660

661

662

663

664

665

666

667

668

669

670

671

672

673

674

675

676

677

678

679

680

681

682

683

684

685

686

687

688

689

690

691

692

693

694

695

696

697

698

699

700

701

702

703

704

705

706

707

708

709

710

711

712

713

714

715

716

717

718

719

720

721

722

723

724

725

726

727

728

729

730

731

732

733

734

735

736

737

738

739

740

741

742

743

744

745

746

747

748

749

750

751

752

753

754

755

756

757

758

759

760

761

762

763

764

765

766

767

768

769

770

771

772

773

774

775

776

777

778

779

780

781

782

783

784

785

786

787

788

789

790

791

792

793

794

795

796

797

798

799

800

801

802

803

804

805

806

807

808

809

810

811

812

813

814

815

816

817

818

819

820

821

822

823

824

825

826

827

828

829

830

831

832

833

834

835

836

837

838

839

840

841

842

843

844

845

846

847

848

849

850

851

852

853

854

855

856

857

858

859

860

861

862

863

864

865

866

867

868

869

870

871

872

873

874

875

876

877

878

879

880

881

882

883

884

885

886

887

888

889

890

891

892

893

894

895

896

897

898

899

900

901

902

903

904

905

906

907

908

909

910

911

912

913

914

915

916

917

918

919

920

921

922

923

924

925

926

927

928

929

930

931

932

933

934

935

936

937

938

939

940

941

942

943

944

945

946

947

948

949

950

951

952

953

954

955

956

957

958

959

960

961

962

963

964

965

966

967

968

969

970

971

972

973

974

975

976

977

978

979

980

981

982

983

984

985

986

987

988

989

990

991

992

993

994

995

996

997

998


999

1000

UNCLASSIFIED

(U) The fourth figure presents the turning results and thrust recovery obtained in the prior experiment which provided motivation for this research. As illustrated with increasing Coanda jet pressure (P_{TD}) the thrust turning increased while the thrust recovery decreased. Results from the IR project configuration with the 0.875-inch radius trailing edge and the aspect ratio 6 nozzle show that the thrust turning angle ranges from 0 degree to 173 degrees for low thrust settings of the thick wall-jet.

(UNCLASSIFIED)

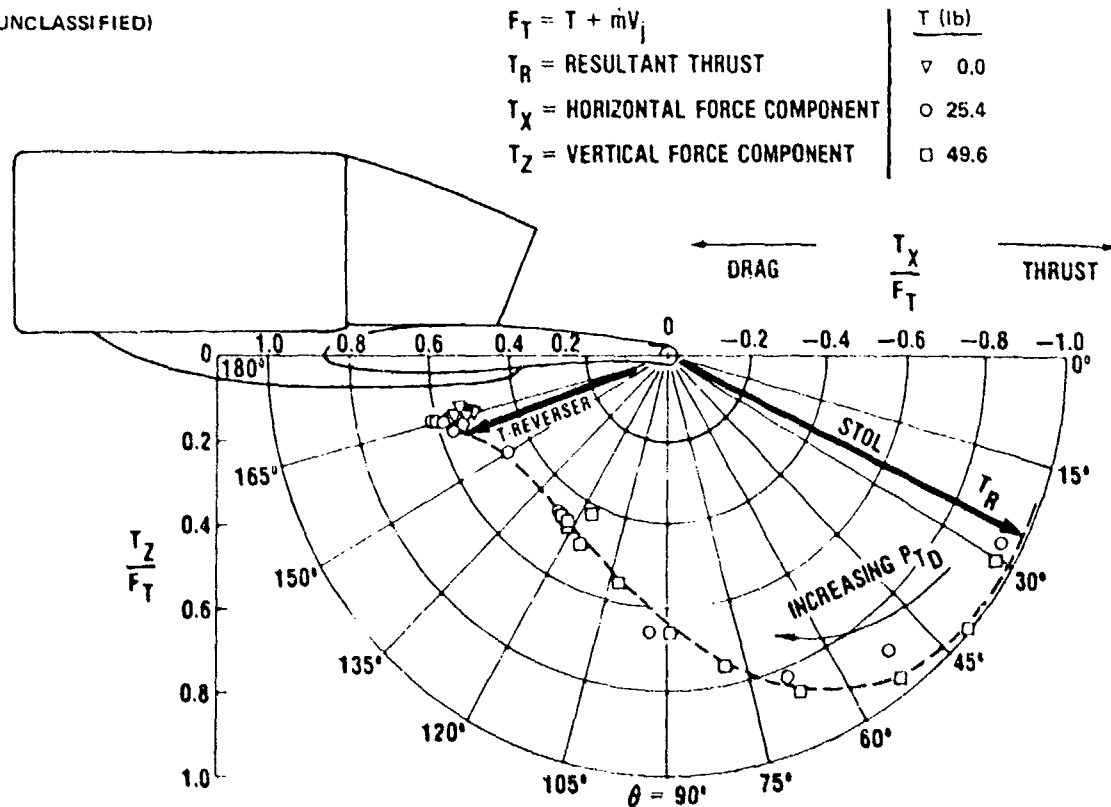

(U) Figure - Circulation Control--Upper Surface Blowing
Turning Angle and Thrust Recovery Efficiency

(U) The following trends were apparent from the experimental data (not included). The increments of variation in nozzle aspect ratio 2, 4, and 6 indicate that an increase in aspect ratio permits higher thrust turning angles for the same Coanda jet mass flow setting. With higher aspect ratio nozzles the maximum turning angle is slightly higher and is reached earlier as the Coanda jet mass flow is increased. The entrainment length of the thick wall-jet nozzle affects the turning performance. As the thick wall-jet nozzle is moved from 0 to 6 thick wall-jet heights away from the Coanda jet exit, thrust turning improves, but at a diminishing rate. In addition, variation in the trailing edge radius influences the maximum turning capabilities of the thick wall-jet. As the radius is increased, the turning performance of the thick wall-jet improves. For a given trailing edge radius, maximum turning angle is increased as thrust is reduced.

UNCLASSIFIED

(U) A first-order analytic estimate of the thick wall-jet turning produced by the thin wall-jet was developed as

$$\cos \theta = - \frac{2rw\Delta p}{T}$$

where θ is the turning angle and Δp is the pressure differential between ambient and surface static pressure on the trailing edge. This estimate was found to agree quite closely with the experimental data, and emphasized the importance of maintaining as large a pressure differential over as much of the trailing edge surface as possible.

(U) The results have been encouraging and further detailed analysis of these parametric data is being supported by the Naval Air Systems Command's Aircraft Exploratory Development program. Continuing research in this area includes static CC/USB thrust turning investigations using both a Harpoon missile turbojet engine and using the NASA Quiet Short-haul Research Aircraft (QSRA). Once static data have substantiated the appropriate design parameters, flight tests may be conducted on an aircraft such as the QSRA.